

Description :

Characteristics :



Material : steel.
Finish: painted white RAL 9010
Installation : by not apparent screws.

Use :

Used for air supply in shops, bathrooms and service spaces. Suitable for ceiling installation, directly on the duct.

Dimensions:

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
EVVMC 80	116	80	38	105	79
EVVMC 100	140	93	38	125	99
EVVMC 125	166	112	45	150	124
EVVMC 150	203	137	50	175	149
EVVMC 160	210	148	50	186	159
EVVMC 200	250	195	56	225	199

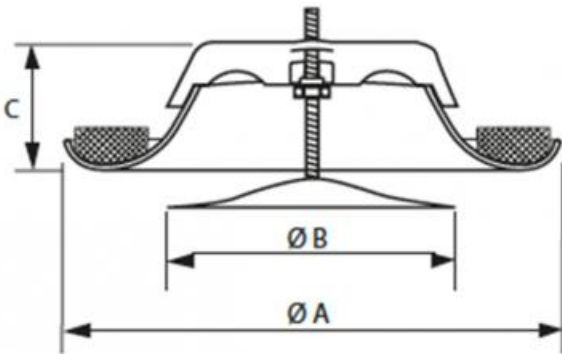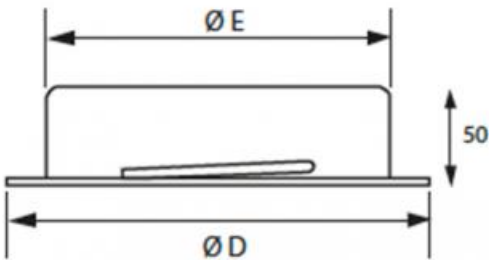

Dati di funzionamento:

Model	m³/h	Opening "S" (mm)	Pressure drop (Pa)	dB(A)
EVVMC 80	60	6	36	23
		3	45	26
		0	68	31
	80	9	45	28
		6	60	30
		3	76	34
		0	120	37
	100	12	80	35
EVVMC 100	100	10	50	25
		5	90	28
		0	180	35
	125	10	70	28
		5	140	34
	150	10	100	33
		5	200	38
EVVMC 125	130	6	38	21
		3	48	24
		0	70	28
		-3	100	31
	160	6	55	27
		3	75	28
		0	110	34
	190	9	70	30
		6	110	34
		5	46	22
EVVMC 150 / 160	160	0	70	24
		-5	120	30
		5	70	25
	190	0	100	28
		-5	180	35
		10	55	24
	220	5	85	28
		0	130	32
		-5	180	35
	250	10	70	27
		5	130	32
		0	180	35
EVVMC 200	300	10	35	22
		0	65	32
		-5	88	30
		-10	140	36
	350	10	49	26
		0	100	34
		10	55	28
	400	0	120	35

Price list

Item normally available
from stock

EVVMC

model	euro
80	▼
100	▼
125	▼
150	▼
160	▼
200	▼

