

EVTD SILENT Centrifugal fan for circular duct



Description

Circular duct fan with sound-deadening insulation, with external terminal box, removable casing and adjustable motor, 230 V power supply.

Characteristics

Material : polypropylene .
Finish: white .
Installation: on a circular duct .
Protection rating: IP44


Use

Suitable for installation in false ceilings or in reduced spaces, in any position .


Accessories

- Non-return damper.
- Fitting for rectangular duct .
- Security net.
- Speed switch (model 250/100 to 1000/200). - Speed regulator (model 1300/250 and 2000/315).

EVTD-SILENT 250 a 1000

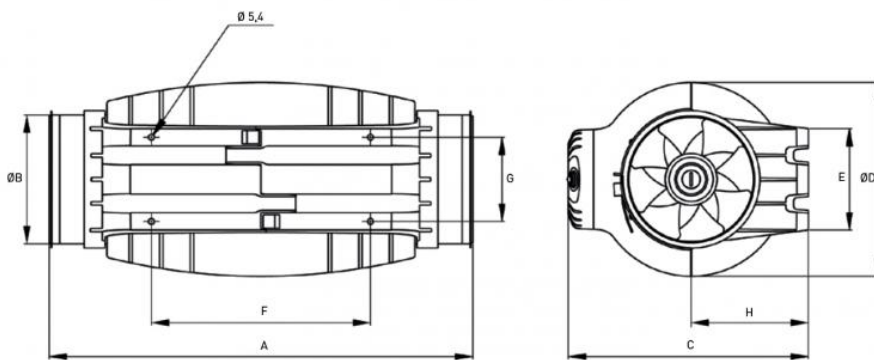

EVTD-SILENT 1300 e 2000

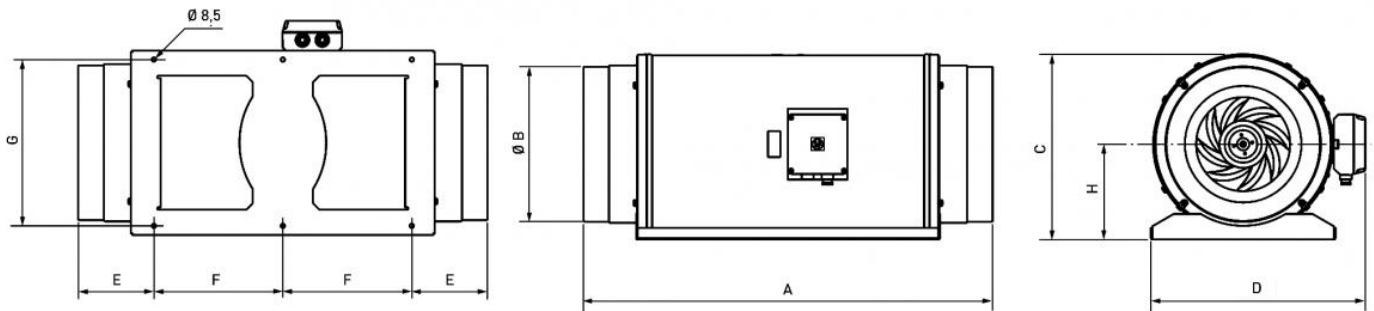

dimensions

all measurements are in mm.

* Viene fornita una ulteriore guarnizione in gomma per installazione in condotti da 160 mm.

model	A	ØB	C	ØD	E	F	G	H
250/100	575	97	252	204	100	250	83	121
350/125	462	123	252	204	100	250	83	121
500/150-160*	484	147	274	221	116	250	96	134
800/200	568	198	327	264	145	340	129	164
1000/200	568	198	327	264	145	340	129	164

modello EVTD -SILENT1300 e 2000	A	ØB	C	D	E	F	G	H
1300/250	680	248	331	387	140	200	280	171
2000/315	825	312	373	432	152	260	335	192

Operating data

modello SILENT	velocità r.p.m.	Potenza Max ass.	Corrente Max ass.	Livello pressione sonora	Portata								
		W	A	dB(A)	0 Pa	40 Pa	80 Pa	100 Pa	150 Pa	200 Pa	250 Pa	350 Pa	
250/100	2210	27	0,12	25	240	195	110	60					
	1680	21	0,1	20	200	135	40						
350/125	2100	27	0,12	23	330	270	160	75					
	1650	21	0,1	18	255	185	45						
500/150-160 3 VELOCITA'	2480	59	0,26	27	525	510	465	445	380	140	10		
	2060	50	0,22	22	425	390	340	310	140	25			
	1610	45	0,2	17	325	270	200	165	40				
800/200 3 VELOCITA'	2170	102	0,5	28	905	860	840	770	680	600	220		
	1870	92	0,47	24	740	720	660	605	530	330	50		
	1660	90	0,4+6	22	645	620	550	505	400	200			
1000/200 3 VELOCITA'	2450	130	0,55	29	1050	990	950	925	860	775	425	100	
	2210	127	0,55	27	900	860	810	775	700	620	260		
	1920	122	0,53	24	800	725	675	650	560	440	160		
1300/250 3 VELOCITA'	2530	204	0,85	36	1320	1260	1200	1140	1050	925	925	400	
	2230	163	0,68	33	1060	1090	975	925	800	650	500	275	
	2030	144	0,6	31	1040	940	825	750	600	475	360	180	
2000/315 3 VELOCITA'	2670	293	1,25	39	1760	1690	1625	1600	1500	1400	1300	1020	
	2490	232	0,97	38	1600	1520	1450	1350	1220	1080	840	520	
	2240	190	0,78	36	1490	1350	1200	1000	900	560	430	320	

Operating temperature and weight

modello SILENT	velocità r.p.m.	Portata aria	Temp. di esercizio	Peso	diametro condotto
		mc/h	°C	Kg	
250/100	2210	250	-20/+40	5,4	100
	1680	200			
350/125	2100	330	-20/+40	5	125
	1650	260			
500/150-160 3 VELOCITA'	2480	550	-20/+60	6	150/160
	2060	450			
	1610	350			
800/200 3 VELOCITA'	2170	910	-20/+60	8,7	200
	1870	780			
	1660	690			
1000/200 3 VELOCITA'	2450	1.040	-20/+60	8,7	200
	2210	910			
	1920	790			
1300/250 3 VELOCITA'	2530	1.320	-20/+60	20	250
	2230	1.160			
	2030	1.040			
2000/315 3 VELOCITA'	2670	1.770	-40/+60	25	315
	2490	1610			
	2240	1.480			

Price list

Item normally available from stock	
modello	ventilatore EVTD SILENT
	euro
250/100	484,65 ✓
350/125	556,28 ✓
500/150-160	697,60 ✓
800/200	1035,28 ✓
1000/200	1140,43 ✓
1300/250	2220,00 ✓
2000/315	2588,56 ✓

accessories list

Item normally available from stock	
modello	euro
REGUL2: commutatore a 2 velocità	88,59 ✓
COM3: commutatore a 3 velocità	355,84 ✓
REB1: regolatore di velocità per modello 1300/250	224,74 ✓
REB2.5: regolatore di velocità per modello 2000/315	279,46 ✓