


# EAG-INOX Grille with rain protection



## Description :

Grid with rainproof protection in stainless steel, suitable for both the external air intake and the expulsion of ambient air.

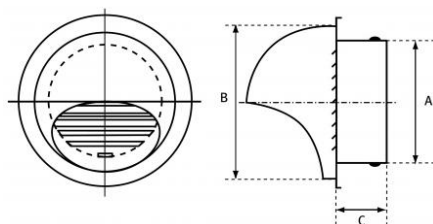

## Data and price list

Item normally available from stock

model	Ø Hole mm	ØA mm	ØB mm	C mm	Effective section m <sup>2</sup>	air flow		Pa	euro
						m <sup>3</sup> /h			
EAG-INOX-100	100	97	133	52	0,0048	75	15	41,49	v
						150	40		
EAG-INOX-125	125	120	165	52	0,0082	100	15	52,20	v
						200	40		
EAG-INOX-150	150	145	192	62	0,0126	300	30	61,63	v
						400	40		
EAG-INOX-160	160	155	192	62	0,0140	400	40	68,40	v
						500	40		
EAG-INOX-200	200	195	253	62	0,0178	500	40	114,26	v
						600	40		