


CFS-CT B Fire resistant coated panel

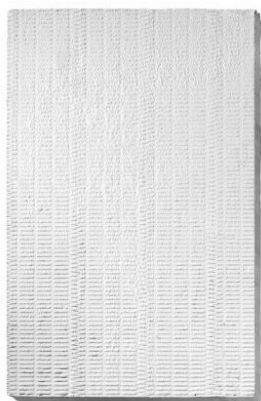

Description :

Fire resistant coated panel for fire damper cladding with the "WEICHSCHOTT" method.

Complementary products

- fire resistant acrylic sealant CFS-S ACR
- fire resistant paint CFS-CT

Characteristics

European technical approval:
- ETA-11 / 0429.
Pre-painted panel for immediate use.
Approximate density 140 kg/m3.
Dimensions (LxDxH) 1000 x 600 x 50 mm.
White.
Easy to cut, does not expose to mineral fibre.

Use

Fire damper cladding.

Price List

model	Dimensions (LxDxH) mm	euro
CFS-CT B	1000 x 600 x 50	a.r. v