


EFPLZ-S pannelli filtranti minipieghe

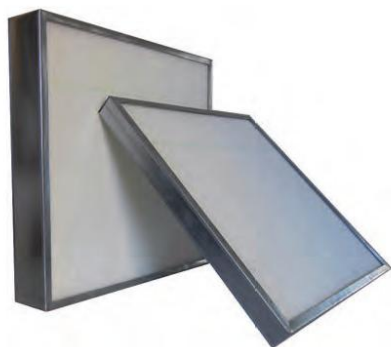

Descrizione

Pleated filter panel in polypropylene fibre with progressive density.

Caratteristiche


Galvanised steel frame.
Polypropylene filter media.
Low pressure drop.
High efficiency with reduced thickness.
Recommended final pressure drop 300 Pa.

Impiego

Pre-filtration on absolute filters.
Air treatment units.
Filtration and ventilation systems.

A richiesta

Filters with non-standard dimensions.

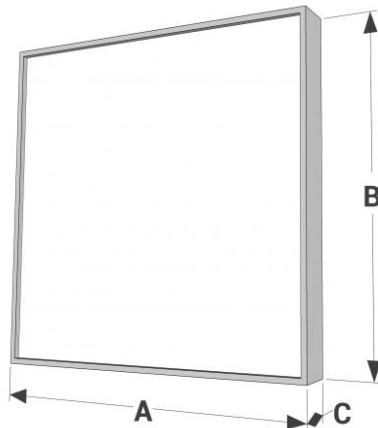

Dimensioni e listino prezzi:

model			flow rate	filtering surface area	Initial pressure drop			EFPLZ-S	EFPLZ-S	EFPLZ-S
Width	Height	Depth			M5	F7	F9	M5	F7	F9
mm	mm	mm	$\frac{m^3}{h}$	m^2	Pa	Pa	Pa	ePM10 55%	ePM2,5 65%	ePM1 80%
A	B	C						euro	euro	euro
287	592	48	1530	3,3	50	125	190	90,09 ∨	94,20 ∨	103,67 ∨
592	592	48	3100	6,6	50	125	190	171,84 ∨	179,89 ∨	199,07 ∨
287	592	98	1700	3,6	70	145	210	a.r. ∨	a.r. ∨	a.r. ∨
592	592	98	3400	7,3	70	145	210	a.r. ∨	a.r. ∨	a.r. ∨