


# EILB Sound absorbing panels

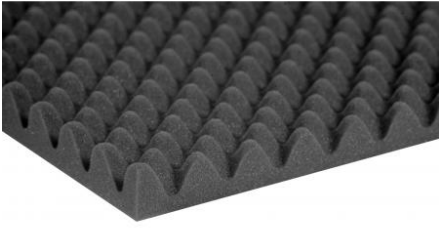

## Description :

Polyurethane foam based on open cell polyester, used for sound absorption.

## Characteristics :

- Color: Grey
  - Operating temperature from -5 ° C to + 65 ° C
  - Density: 25 kg / m<sup>3</sup>
  - Regular cellular structure
  - Good resistance to airflow resulting in better absorption acoustic
  - Resistance to organic solvents
  - Good tensile and tear strength
  - Good resistance to aging.
- The particular formulation of the polyester-based foam allows to pass the fire behavior test FMVSS MOTOR VEHICLE SAFETY Std 302, with all the thicknesses proposed.

## Use :

Sound absorbing coating of rooms and equipment; suitable for exposed installation.

## Models :

EILB sound absorbing panels  
EILBR embossed plate roll

## Notes :

The material may be painted, remembering that an excessive thickness of paint on the surface could change the acoustic absorption capacity at various frequencies.

## On demand:

Lastre accoppiate con film nero poliolefinico nero gofrato, metallizzato gofrato o alluminio.

### Dimensions and price list

Item normally available from stock

model	thickness	plate dimension	adhesive plate price
	mm	m	euro/m <sup>2</sup>
EILB	10+10	2x1	a.r. ∨
EILB	15+15	2x1	39,77 ∨
EILB	20+20	2x1	a.r. ∨

### Dimensions and price list

Item normally available from stock

model	thickness	roll dimension	adhesive plate price
	mm	m	euro/m <sup>2</sup>
EILBR	10+10	32x1,5	a.r. ∨
EILBR	15+15	24,6x1,5	a.r. ∨
EILBR	20+20	16,5x1,5	41,70 ∨
EILBR	20+30	14x1,5	a.r. ∨