



Description

Galvanized sheet metal duct with circular section.


Characteristics

Material : galvanized sheet.
Size : 2 m standard.


On demand

Material :
- stainless steel;
- insulated double pipe wall.

Caratteristiche tecniche

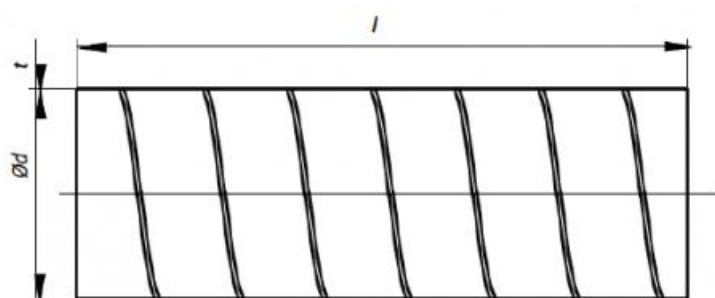

Senza nervature di rinforzo $d \leq 450$

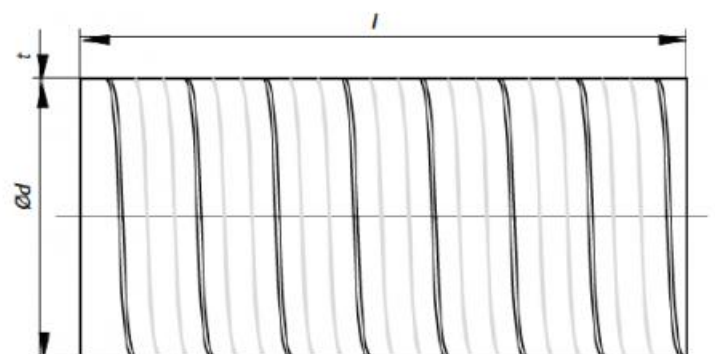

Con nervature di rinforzo $d \geq 450$

* con venatura di rinforzo

Ød mm	perimetro $\pi \times \text{Ød}$ m	t mm	kg/m
80	0,251	0,5	1,19
100	0,314	0,5	1,38
125	0,393	0,5	1,94
150	0,471	0,5	2,21
160	0,503	0,5	2,49
200	0,628	0,5	3,10
250	0,785	0,5	4,31
300	0,942	0,6	5,18
315	0,990	0,6	5,44
355	1,115	0,6	6,13
400	1,257	0,6	9,21
450*	1,414	0,6	10,36
500*	1,571	0,6	11,51
560*	1,759	0,6	12,90
630*	1,979	0,7	14,52
710*	2,231	0,8	16,36
800*	2,513	0,8	18,44
900*	2,827	0,8	25,93
1000*	3,142	0,8	28,81
1120*	3,519	0,8	32,25
1200*	3,768	0,9	32,25
1250*	3,927	0,9	36,00

Dimensions and price list

Item normally available from stock			
diameter	1 ml	2 ml	3 ml
	euro/m	euro/m	euro/m
80	13,25 v	10,42 v	a.r. v
100	14,91 v	11,74 v	a.r. v
125	18,23 v	14,34 v	a.r. v
150	21,54 v	16,95 v	a.r. v
160	23,19 v	18,25 v	a.r. v
180	24,85 v	19,56 v	a.r. v
200	29,82 v	23,46 v	a.r. v
250	36,44 v	28,68 v	a.r. v
300	53,01 v	41,72 v	a.r. v
315	54,66 v	43,02 v	a.r. v
355	61,29 v	48,23 v	a.r. v
400	69,57 v	54,75 v	a.r. v
450	76,19 v	59,96 v	a.r. v
500	86,14 v	67,79 v	a.r. v
560	96,07 v	75,61 v	a.r. v
600	102,69 v	80,82 v	a.r. v
630	a.r. v	a.r. v	a.r. v
710	a.r. v	a.r. v	a.r. v
800	a.r. v	a.r. v	a.r. v
900	a.r. v	a.r. v	a.r. v
1000	a.r. v	a.r. v	a.r. v
1120	a.r. v	a.r. v	a.r. v
1200	a.r. v	a.r. v	a.r. v
1250	a.r. v	a.r. v	a.r. v