

EVPMC Air intake and exhaust ABS valves



Description :

Characteristics :


Material : ABS.
Finish: white RAL 9010
Installation : by not apparent screws

Use :

Used for air exhaust and supply in shops, bathrooms and service spaces. Suitable for ceiling installation, directly on the duct.

Dimensions:

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVPMC 100	99	149	89	20
EVPMC 125	124	165	109	20
EVPMC 150	148	185	130	20
EVPMC 160	158	195	130	20
EVPMC 200	199	230	177	20

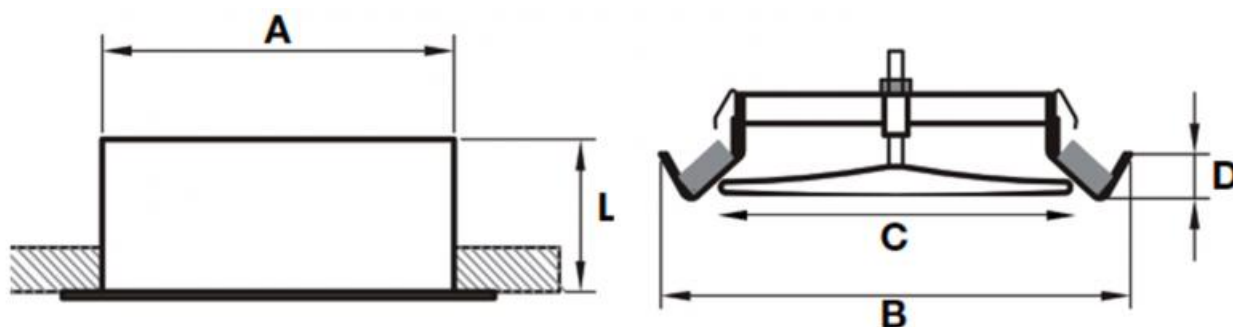

Dati di funzionamento:

Model	m ³ /h	Opening "S" (mm)	Pressure drop (Pa)	dB(A)
EVPMC 100	54	15	25	25
	72	18	40	30
	108	20	80	38
EVPMC 125	72	9	58	38
	108	17	68	35
	144	23	70	35
EVPMC 150 / 160	108	10	70	40
	144	18	68	35
	180	25	70	33
EVPMC 200	108	17	60	38
	144	22	68	35
	180	25	72	35

Price list:

Item normally available from stock	
model	euro
100	5,71 ∨
125	6,63 ∨
150	8,59 ∨
160	10,10 ∨
200	13,39 ∨