


EILB Sound absorbing panels

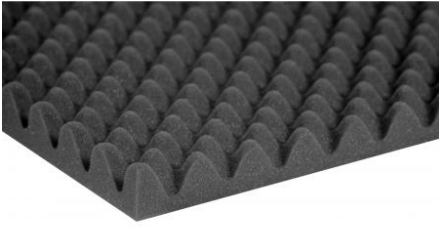

Description :

Polyurethane foam based on open cell polyester, used for sound absorption.

Characteristics :

- Color: Grey
 - Operating temperature from -5 ° C to + 65 ° C
 - Density: 25 kg / m³
 - Regular cellular structure
 - Good resistance to airflow resulting in better absorption acoustic
 - Resistance to organic solvents
 - Good tensile and tear strength
 - Good resistance to aging.
- The particular formulation of the polyester-based foam allows to pass the fire behavior test FMVSS MOTOR VEHICLE SAFETY Std 302, with all the thicknesses proposed.

Use :

Sound absorbing coating of rooms and equipment; suitable for exposed installation.

Models :

EILB sound absorbing panels
EILBR embossed plate roll

Notes :

The material may be painted, remembering that an excessive thickness of paint on the surface could change the acoustic absorption capacity at various frequencies.

On demand:

Lastre accoppiate con film nero poliolefinico nero gofrato, metallizzato gofrato o alluminio.

Dimensions and price list

Item normally available from stock

model	thickness	plate dimension	adhesive plate price
	mm	m	euro/m ²
EILB	10+10	2x1	a.r. ∨
EILB	15+15	2x1	39,77 ∨
EILB	20+20	2x1	a.r. ∨

Dimensions and price list

Item normally available from stock

model	thickness	roll dimension	adhesive plate price
	mm	m	euro/m ²
EILBR	10+10	32x1,5	a.r. ∨
EILBR	15+15	24,6x1,5	a.r. ∨
EILBR	20+20	16,5x1,5	41,70 ∨
EILBR	20+30	14x1,5	a.r. ∨