

# EVPMC Air intake and exhaust ABS valves



## Description :

## Characteristics :


Material : ABS.  
 Finish: white RAL 9010  
 Installation : by not apparent screws

## Use :

Used for air exhaust and supply in shops, bathrooms and service spaces. Suitable for ceiling installation, directly on the duct.

## Dimensions:

Model	A (mm)	B (mm)	C (mm)	D (mm)
EVPMC 100	99	149	89	20
EVPMC 125	124	165	109	20
EVPMC 150	148	185	130	20
EVPMC 160	158	195	130	20
EVPMC 200	199	230	177	20

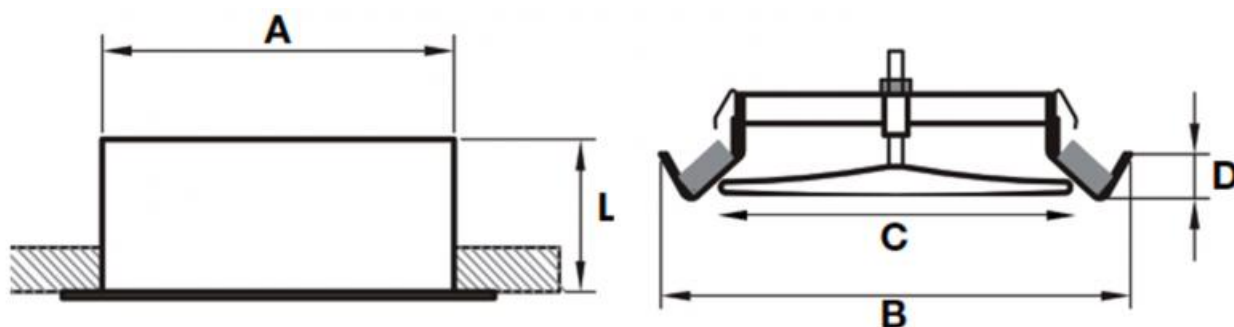

## Dati di funzionamento:

Model	m <sup>3</sup> /h	Opening "S" (mm)	Pressure drop (Pa)	dB(A)
EVPMC 100	54	15	25	25
	72	18	40	30
	108	20	80	38
EVPMC 125	72	9	58	38
	108	17	68	35
	144	23	70	35
EVPMC 150 / 160	108	10	70	40
	144	18	68	35
	180	25	70	33
EVPMC 200	108	17	60	38
	144	22	68	35
	180	25	72	35

## Price list:

Item normally available from stock	
model	euro
100	5,71 ∨
125	6,63 ∨
150	8,59 ∨
160	10,10 ∨
200	13,39 ∨